

# CE 451

## Case Erector



### High Speed Case Erector

- Up to 45 Cases Per Minute
- Erects RSC & HSC Style Cases
- Small Footprint
- Allen Bradley Micrologix PLC
- Easy Load Hopper
- Multiple Case Size Capability



# CE 451

## Case Erector

### Standard Features:


- Heavy Duty Construction
- Nordson Hot Melt Glue System
- Handles Treated and Coated Corrugated Materials
- Quick Changeover
- Fully Interlocked Safety Doors
- Operator Control Panel with Display Screen

### Available Options:

- High Capacity Powered Hoppers  
6' hopper capacity - 270 C-Flute  
10' hopper capacity - 390 C-Flute  
15' hopper capacity - 540 C-Flute
- Steel Casters (convenient portability)
- Water Resistant Packages
- On Demand Stop-Start
- Opposite Hand Construction
- Oversize Case Capabilities

To learn more about the CE 451 and SWF Companies' broad line of forming, erecting and sealing solutions for secondary packaging, case/tray packing systems, horizontal/vertical cartoners and robotic packaging solutions, please visit our website at [www.swfcompanies.com](http://www.swfcompanies.com)

### Case Specifications:

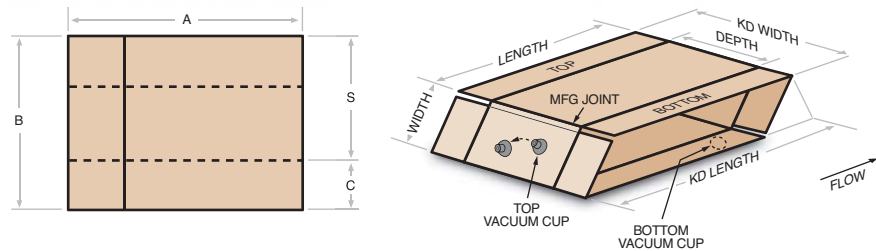

CE 451 Case Size Ranges		
SET UP:	STANDARD MIN.	STANDARD MAX.
LENGTH	8" (20.32cm)	22.5" (57.15cm)
WIDTH	5" (12.7cm)	14" (35.6cm)
DEPTH	5" (12.7cm)	15" (38.1cm)
<b>KNOCKED DOWN</b>		
A DIMENSION	13" (33.02cm)	34" (86.4cm)
B DIMENSION	11" (27.9cm)	24" (61.0cm)
S (DEPTH + TOP FLAPS)	8" (20.3cm)	19" (48.3cm)
C (FLAPS TO BE GLUED)	3" (7.6cm)	6" (15.2cm)


Note: Specifications subject to change without notice.

### Machinery Specifications:

#### Utilities Required:

Electrical: 230 Volts, 3 Phase, 60 Hz @ 30 amps

Air: 30 CFM @ 80 PSI

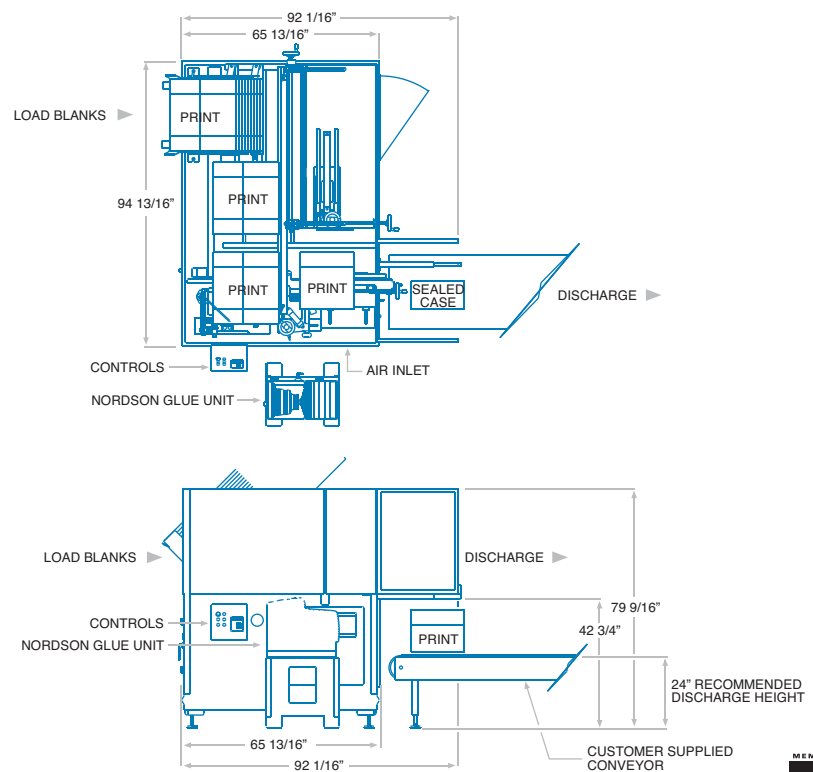

[www.swfcompanies.com](http://www.swfcompanies.com) | 559.638.8484 | [info@swfcompanies.com](mailto:info@swfcompanies.com)

