

TL 100 PICK AND PLACE CASE PACKER

Reliable Packing for a Variety of Environments

- Up To 35 Placements Per Minute
- Rigid Steel Frame
- One Wide Capability
- Single-Lane Product Infeed Conveyor
- Rugged, Reliable, Low Maintenance
- Optional Wet/Corrosive Environment Packages



A DOVER COMPANY

TL 100 PICK AND PLACE CASE PACKER

Standard Features:

- Allen Bradley PLC
- Panelmate Operator Interface
- Venturi-Based Vacuum Cup Pick Head
- Automatic Case Positioner Conveyor

Available Options:

- Stainless Steel Construction
- Control Panel Pendant
- Extra E-Stop Station
- Extra Button Control Station
- Custom Color
- Corrosion Resistant Packages
- Wet Environment Resistant Packages
- Third Axis Servo-Drive
- High-Flow Vacuum Systems
- Product and Case Infeeds to Meet Your Requirements

The standard TL 100 packer is designed for dry food environment with no wash-down; however, available option packages allow for wet wash-down environment packing as well as corrosive wash-down environment packing.

All panels on the TL 100 are either hinged or easily removed for accessibility. This helps prevent injury and adds to the production line appearance. All doors that can be opened by hand, using no tools, have safety lockout devices. All control switches are conveniently located at the case loading position on the machine, immediately accessible to the operator.

Additional features of the TL 100 are customer- and product-dependent including the type of vacuum system and the type of pick head, allowing for maximum efficiency and customer satisfaction.



Infed view




Discharge view

MACHINERY SPECIFICATIONS

Electrical: 460 VAC, 60 HZ, 3 Phase,

Control Voltage: 24 VDC

Air Req.: 5 CFM @ 80 PSI

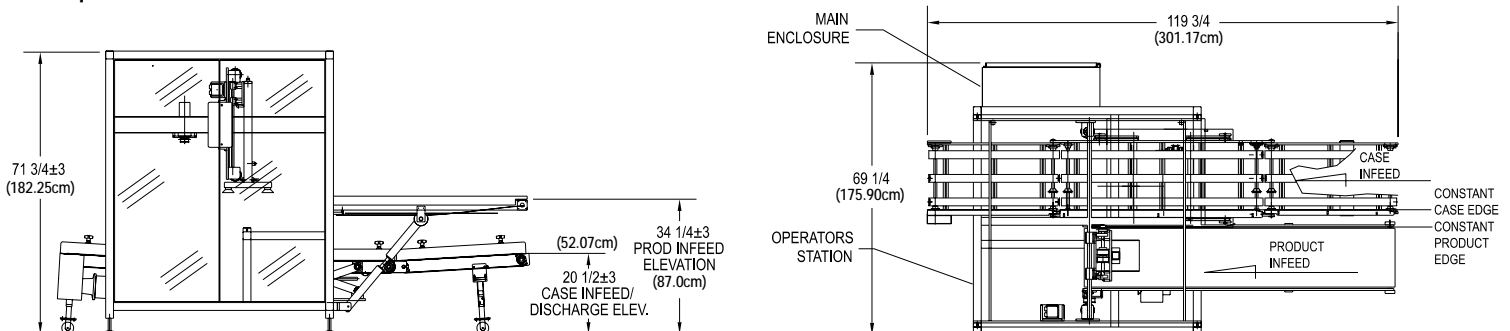

900 East Chemical Drive • P.O. Box 6820 • Kennewick, WA 99336
 Phone: (509) 586-2105 • Fax: (509) 582-4519 • Toll Free USA: (800) 228-3962
 E-mail: swfnw@swfcompanies.net • Web Site: www.swfcompanies.com

